


3.2d FIRE BARRIER CABLE GLAND - DADR series



CHARACTERISTICS: For armoured cable, inner and outer seals, armour grounding.
Suitable for enclosures over 2 litres whit sparking equipments

APPLICATION: For outdoors with complete protection of cable armour


PROTECTION DEGREE: IP66.

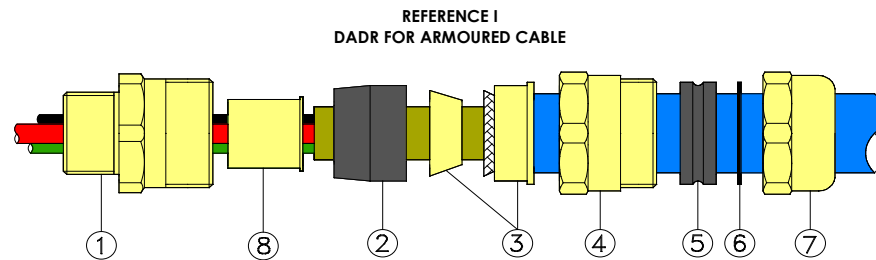

REFERENCE I
DADR FOR ARMURED CABLE

- 1 - Body
- 2 - Inner seal
- 3 - Armour clamping ring
- 4 - Middle body
- 5 - Outer seal
- 6 - Washer
- 7 - Gland nut
- 8 - Sealing chamber

→Sample of designation: **DADR1.1015 M20x1,5**

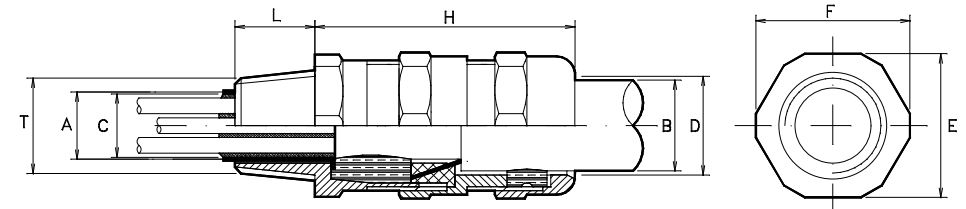

L=Thread lenght: see comparison table

SIZE	Thread T	TYPE	Cable dimensions				Gland dimensions				
			A		B		C	D	H	E	F
			min	max	min	max	mm	mm	mm	mm	mm
1	1/2"NPT - M20x1,5 - Pg13,5 3/4"NPT - M25x1,5 - Pg16	DADR1.8*	5,5	8	10 14	15 19	12	20	65	32	35
		DADR1.10*	8	10,5							
		DADR1.13*	10,5	13							
2	3/4"NPT - M25x1,5 - Pg16	DADR2.13*	10,5	13	15 19	20 24	17	25	65	36	39
		DADR2.15*	13	15,5							
		DADR2.18*	15,5	18							
3	1"NPT - M32x1,5 - Pg21	DADR3.18*	15	18	20 25	26 31	23	32	82	45	49
		DADR3.21*	18	21							
		DADR3.24*	21	24							
4	1"1/4NPT - M40x1,5 - Pg29	DADR4.24*	21	24	26 31	32 37	29	38	83	50	55
		DADR4.27*	24	27							
		DADR4.30*	27	30							
5	1"1/2NPT - M50x1,5 - Pg36	DADR5.27*	24	27	31 36	37 43	35	44	83	57	62
		DADR5.30*	27	30							
		DADR5.33*	30	33							
		DADR5.36*	33	36							
6	2"NPT - M63x1,5 - Pg42	DADR6.39*	36	39	42 47	48 53	45	54	83	67	73
		DADR6.42*	39	42							
		DADR6.45*	42	45							
7	2"1/2NPT - M75x1,5 - Pg48	DADR7.48*	45	48	52 58	58 64	55	65	83	80	88
		DADR7.51*	48	51							
		DADR7.54*	51	54							