


### 3.2c FIRE BARRIER CABLE GLAND - DASR series

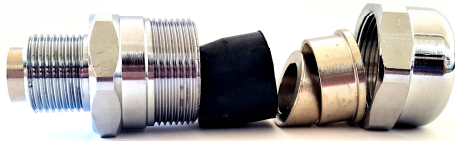


**CHARACTERISTICS:** For armoured cable, inner seal under armour and armour grounding.  
Suitable for enclosures over 2 litres whit sparking equipments

**APPLICATION:** For indoors, without armour protection


**PROTECTION DEGREE:** IP66.

REFERENCE H  
DASR FOR ARMURED CABLE

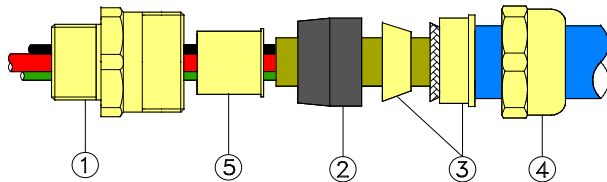

- 1 - Body
- 2 - Seal
- 4 - Gland nut
- 5 - Sealing chamber

→Sample of designation: **DASR1.10 M20x1,5**

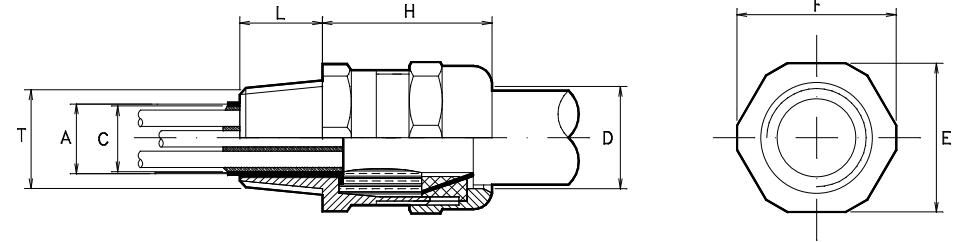

L=Thread lenght: see comparison table

SIZE	Thread T	Cable dimensions TYPE	A		C mm	D mm	H mm	E mm	F mm
			min	max					
1	1/2"NPT - M20x1,5 - Pg13,5 3/4"NPT - M25x1,5 - Pg16	DASR1.8	5,5	8	12	20	41	32	35
		DASR1.10	8	10,5					
		DASR1.13	10,5	13					
2	3/4"NPT - M25x1,5 - Pg16	DASR2.13	10,5	13	17	25	41	36	39
		DASR2.15	13	15,5					
		DASR2.18	15,5	18					
3	1"NPT - M32x1,5 - Pg21	DASR3.18	15	18	25	32	52	45	49
		DASR3.21	18	21					
		DASR3.24	21	24					
4	1"1/4NPT - M40x1,5 - Pg29	DASR4.24	21	24	29	38	53	50	55
		DASR4.27	24	27					
		DASR4.30	27	30					
5	1"1/2NPT - M50x1,5 - Pg36	DASR5.27	24	27	35	44	53	57	62
		DASR5.30	27	30					
		DASR5.33	30	33					
		DASR5.36	33	36					
6	2"NPT - M63x1,5 - Pg42	DASR6.39	36	39	45	54	53	67	73
		DASR6.42	39	42					
		DASR6.45	42	45					
7	2"1/2NPT - M75x1,5 - Pg48	DASR7.48	45	48	55	65	53	80	88
		DASR7.51	48	51					
		DASR7.54	51	54					