

3. PRODUCTS


3.1C CABLE GLAND - DAS series





CHARACTERISTICS: For armoured cable, inner seal under armour and armour grounding

APPLICATION: For indoors, without armour protection

PROTECTION DEGREE: IP66.

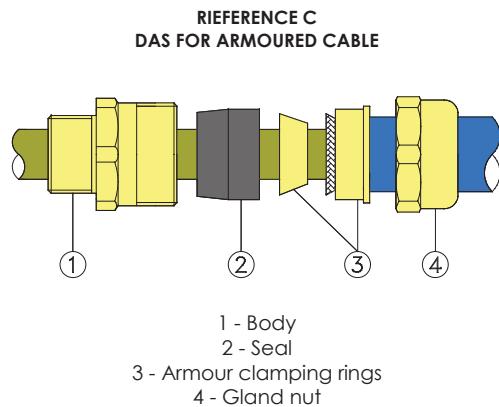

→ Sample of designation: **DAS1.10 M20x1,5**

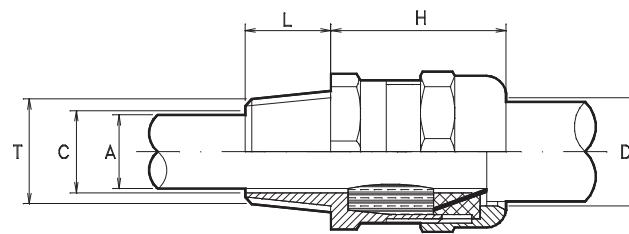

L=Thread lenght: see comparison table

SIZE	T	FILETTATURA	DIMENSIONE DEL CAVO		DIMENSIONE DEL PRESSACAVO						
			TYPE	A	min	max	mm	mm	mm		
0		3/8"NPT - M16x1,5 - Pg9/11 1/2"NPT - M20x1,5 - Pg13,5	DAS0.10	7	10		11	16	33	24	26
1		1/2"NPT - M20x1,5 - Pg13,5 3/4"NPT - M25x1,5 - Pg16	DAS1.8	5,5	8		14	20	41	32	35
			DAS1.10	8	10,5						
			DAS1.13	10,5	13						
2		3/4"NPT - M25x1,5 - Pg16	DAS2.13	10,5	13		19	25	41	36	39
			DAS2.15	13	15,5						
			DAS2.18	15,5	18						
3		1"NPT - M32x1,5 - Pg21	DAS3.18	15	18		25	32	52	45	49
			DAS3.21	18	21						
			DAS3.24	21	24						
4		1"1/4NPT - M40x1,5 - Pg29	DAS4.24	21	24		31	38	53	50	55
			DAS4.27	24	27						
			DAS4.30	27	30						
5		1"1/2NPT - M50x1,5 - Pg36	DAS5.27	24	27		37	44	53	57	62
			DAS5.30	27	30						
			DAS5.33	30	33						
6		2"NPT - M63x1,5 - Pg42	DAS5.36	33	36		47	54	53	67	73
			DAS6.39	36	39						
			DAS6.42	39	42						
7		2"1/2NPT - M75x1,5 - Pg48	DAS6.45	42	45		57	65	53	80	88
			DAS7.48	45	48						
			DAS7.51	48	51						
			DAS7.54	51	54						