



3.2a FIRE BARRIER CABLE GLAND- DNR series

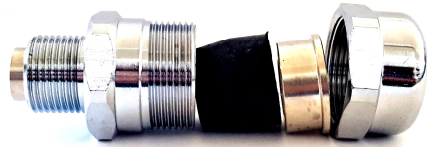

CHARACTERISTICS: For unarmoured cable, outer seal.
Suitable for enclosures over 2 litres whit sparking equipments


APPLICATION: For general use, indoors and outdoors

PROTECTION DEGREE: IP66.

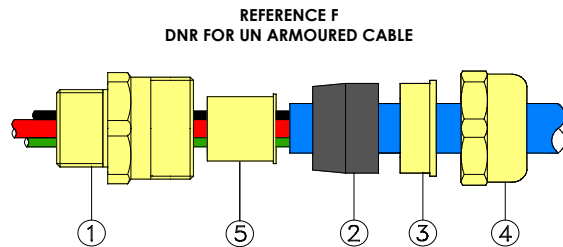

- REFERENCE F
DNR FOR UN ARMoured CABLE
- 1 - Body
 - 2 - Seal
 - 3 - Press-ring
 - 4 - Gland nut
 - 5 - Sealing chamber

→Sample of designation: **DNR1.10 M20x1,5**

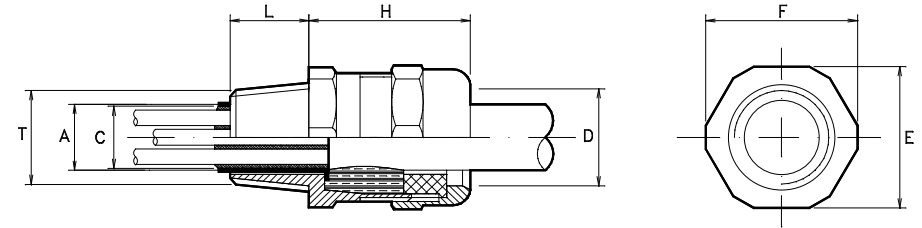

L=Thread length: see comparison table

SIZE	Thread T	Cable dimensions TYPE	Gland dimensions						
			A		C	D	H	E	F
			min	max					
1	1/2"NPT - M20x1,5 - Pg13,5 3/4"NPT - M25x1,5 - Pg16	DNR1.8	5,5	8	12	20	41	32	35
		DNR1.10	8	10,5					
		DNR1.13	10,5	13					
2	3/4"NPT - M25x1,5 - Pg16	DNR2.13	10,5	13	17	25	41	36	39
		DNR2.15	13	15,5					
		DNR2.18	15,5	18					
3	1"NPT - M32x1,5 - Pg21	DNR3.18	15	18	23	32	52	45	49
		DNR3.21	18	21					
		DNR3.24	21	24					
4	1 1/4"NPT - M40x1,5 - Pg29	DNR4.24	21	24	29	38	53	50	55
		DNR4.27	24	27					
		DNR4.30	27	30					
5	1 1/2"NPT - M50x1,5 - Pg36	DNR5.27	24	27	35	44	53	57	62
		DNR5.30	27	30					
		DNR5.33	30	33					
6	2"NPT - M63x1,5 - Pg42	DNR5.36	33	36	45	54	53	67	73
		DNR6.39	36	39					
		DNR6.42	39	42					
7	2 1/2"NPT - M75x1,5 - Pg48	DNR6.45	42	45	55	65	53	80	88
		DNR7.48	45	48					
		DNR7.51	48	51					
		DNR7.54	51	54					