


### 3.1b CABLE GLAND - DNC series

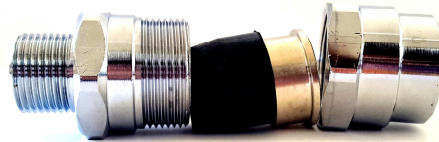


**CHARACTERISTICS:** For unarmoured cable, outer seal  
Suitable for flexible conduit coupling

**APPLICATION:** General use, indoors and outdoors

**PROTECTION DEGREE:** IP66.


REFERENCE B  
DNC FOR UNARMOURED CABLE

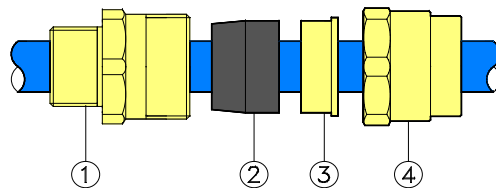

- 1 - Body
- 2 - Seal
- 3 - Press-ring
- 4 - Gland nut

**NOTE:** thread **G**=ISO 7/1 RP-BSPP. Other threads on request.

→Sample of designation: **DNC1.10 M20x1,5**

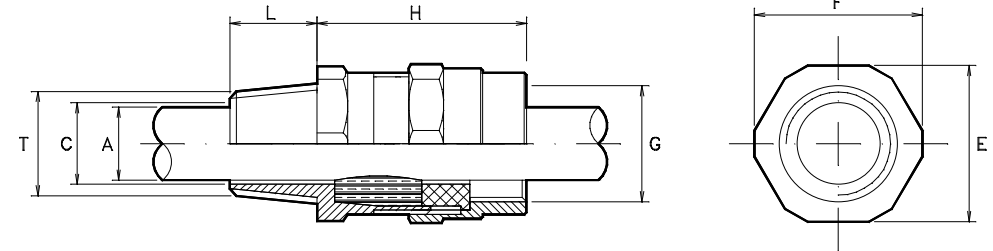

L=Thread length: see comparison table

SIZE	Thread T	TYPE	Cable dimensions A		Gland dimensions				
			min	max	C mm	H mm	E mm	F mm	G mm
1	1/2"NPT - M20x1,5 - Pg13,5 3/4"NPT - M25x1,5 - Pg16	DNC1.8	5,5	8	14	41	32	35	1/2"
		DNC1.10	8	10,5					
		DNC1.13	10,5	13					
2	3/4"NPT - M25x1,5 - Pg16	DNC2.13	10,5	13	19	41	36	39	3/4"
		DNC2.15	13	15,5					
		DNC2.18	15,5	18					
3	1"NPT - M32x1,5 - Pg21	DNC3.18	15	18	25	52	45	49	1"
		DNC3.21	18	21					
		DNC3.24	21	24					
4	1"1/4NPT - M40x1,5 - Pg29	DNC4.24	21	24	31	53	50	55	1"1/4"
		DNC4.27	24	27					
		DNC4.30	27	30					
5	1"1/2NPT - M50x1,5 - Pg36	DNC5.27	24	27	37	53	57	62	1"1/2"
		DNC5.30	27	30					
		DNC5.33	30	33					
		DNC5.36	33	36					
6	2"NPT - M63x1,5 - Pg42	DNC6.39	36	39	47	53	67	73	2"
		DNC6.42	39	42					
		DNC6.45	42	45					